



SHAFT PLAN



Side counterweight
(single entrance car)




Side counterweight
(through type car)

Rate rerovitatem anditatqui conse vel moles qui ullupta dolupta tusandunti re verro volor min pedicias eostora nobis nos el ipsae que eatus incias dolore, eum que volectia seque prae nonserias volore volut pro et latempost qui in nit et ra sae volupta tquat.

Olupit autemperes alibus qui cum ea dolectam apiciderrore none duntur asitium rescillanda vento verferfere esequi blaut rescipsam volore dipit, seceriam, ommoluptatio maximi, voles eos eri

Product overview

| | |
|------------------|----------------------------------|
| Speed (m/s) | 1.0 to 2.5 |
| Load (kg) | 630 to 1150 |
| Number of floors | max 48 |
| Max travel (m) | up to 135 |
| Car group size | max 4 |
| Car type | single entrance and through type |
| Car height (mm) | 2200 to 2600 |
| Door height (mm) | 2100 |
| Door width (mm) | 800 to 1000 |
| Door type | Center and side opening |

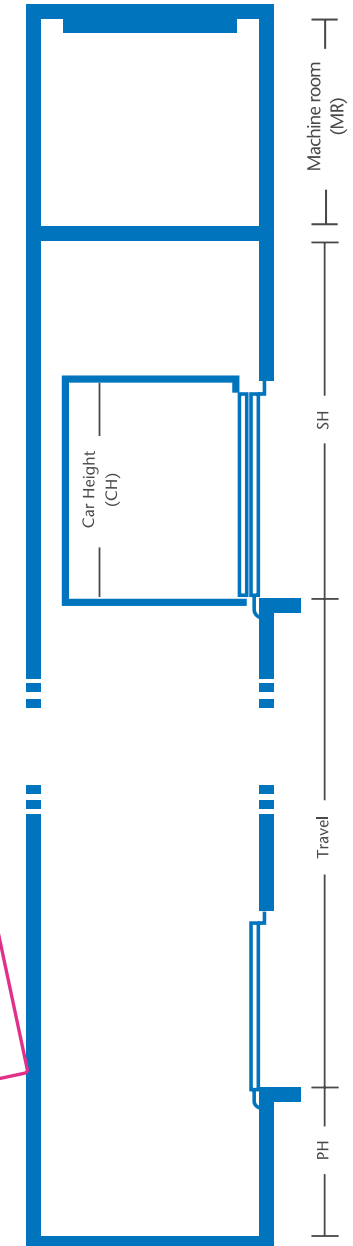


EXAMPLE

KONE E MINISPACE™ DX PLANNING DATA

The planning data provided here is included for informational purposes only. For more details please refer to the technical documentation. Your local KONE representative will be happy to answer any questions you may have regarding the elevator specification process.

EXAMPLE

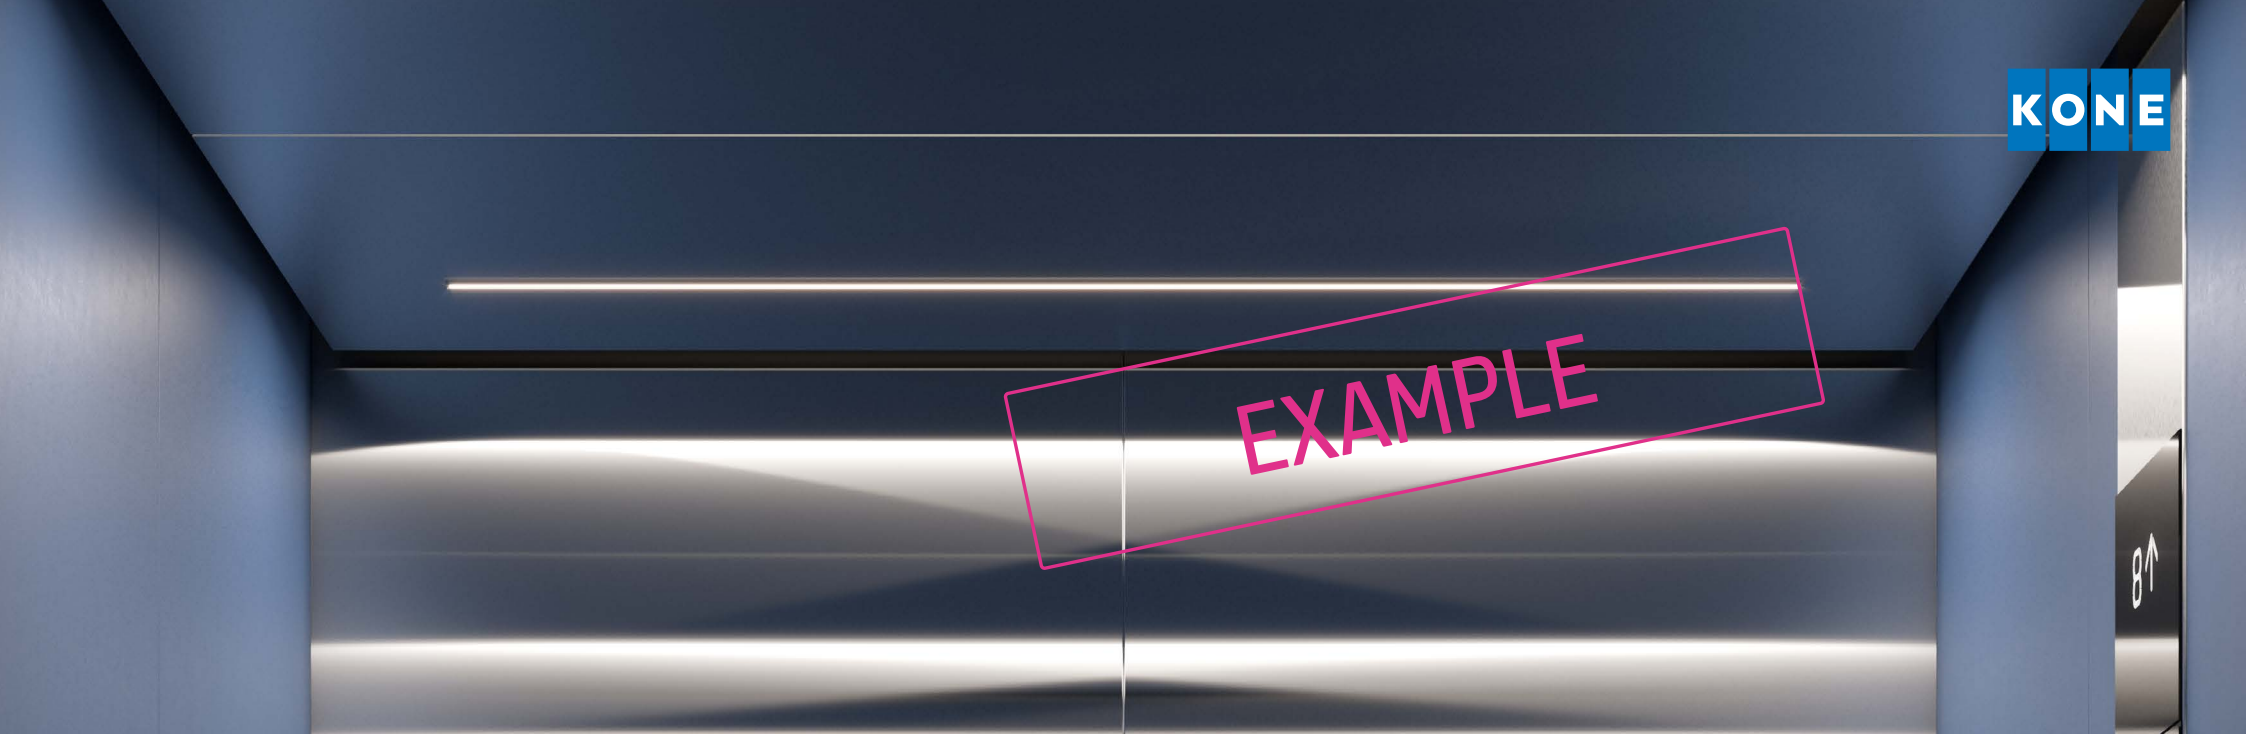

Shaft dimensions – KONE E MiniSpace™ DX

| | | | | |
|------------------------------------|------------|-----------|-----------|-----------|
| Load (kg) | 630 | 800 | 1000 | 1150 |
| Car size (mm) | 1100*1400 | 1350*1400 | 1600*1400 | 1700*1500 |
| Door width (mm) | 800 | 800 | 900 | 1000 |
| Shaft size (mm) | ≤ 1.75 m/s | 1750*1850 | 1950*1850 | 2200*1850 |
| | ≤ 2.5 m/s | 1750*1850 | 2050*1850 | 2200*1850 |
| Car height (mm) | 2400 | | | |
| Overhead height (mm) ¹⁾ | ≤ 1.75 m/s | 1750*1850 | 1950*1850 | 2200*1850 |
| | ≤ 2.5 m/s | 1750*1850 | 2050*1850 | 2200*1850 |
| Pit depth (mm) | 1.75 m/s | 4050 | 4050 | 4100 |
| | 2.0 m/s | 4150 | 4150 | 4170 |
| | 2.5 m/s | 4500 | 4500 | 4500 |
| | 1.0 m/s | 1150 | 1150 | 1150 |
| | 1.6 m/s | 1250 | 1250 | 1250 |
| Pit depth (mm) | 1.75 m/s | 1300 | 1300 | 1300 |
| | 2.0 m/s | 1400 | 1400 | 1400 |
| | 2.5 m/s | 1850 | 1850 | 1850 |
| | | | | NA |

¹⁾ With car height 2400mm. Choice of car height influences overhead dimension